The Radiance Arena System. **Touring Just Got Better.**





Complete hazer and fan control is achieved via four DMX channels. Hidden in the base, the fan tray slides smoothly into position, giving the road case full support via the fifth wheel. The TwisterX Fan rotates 180 degrees providing wide haze dispersion in forward direction and focused dispersion in reverse direction. This system will push haze up to 1,500 cubic feet per minute.

a major advancement in water-based haze technology.

Luminous 7 Haze Fluid should be used with the Radiance Arena System. With an extremely long hang time, it produces a beautiful haze and using it maintains your five-year warranty against

manufacturer's


defect.



ultratecfx.com

SETTING THE STANDARD IN SPECIAL EFFECTS FOR OVER 25 YEARS



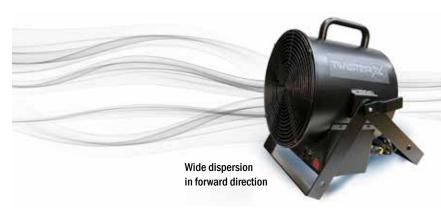





1,500 CFM at 2,750 FPM at full speed output



Radiance Hazer tray slides out for easy access





Access panel on the back of wheeled road case



Fifth wheel under the fan tray provides full support

Note: Radiance Arena System
ships with 5-pin DMX cables
installed & daisy chained for
quick & easy setup

MODELS	
CLF-2484	Radiance Arena System 110V
CLF-2487	Radiance Arena System 220V (CE certified)
CLF-2489	Radiance Arena System - Road Case Only

RADIANCE HAZER SPECIFICATIONS		
Power Cord:	6 ft - 1.8 m	
Heater Watts:	500 Watts	
Rating:	110 volt AC 50/60 hz 5 amps.	
Regulatory Compliance:	This product has been certified to CSA/UL Standards by QPS Canada Inc.	

WARRANTY

The Radiance Arena System has a five-year warranty against manufacturer's defect provided Ultratec fluids are used.

TWISTERX FAN SPECIFICATIONS		
Output:	1500 cfm @ 2750 fpm	
Power:	120 Vac 4 Amps	
Noise Level:	72 dB (full speed focused)	
Regulatory Compliance:	This product has been certified to CSA/UL Standards by QPS Canada Inc.	

Note: road case is 20" wide x 24" deep x 37" tall and weighs 160 lbs.

Visit www.ultratecfx.com to see available accessories, parts and for a complete set of specifications on all models.